


Link-Belt
EXCAVATORS

170 X4S

BROCHURE








BUILT FOR OPERATORS

Developed from the solid foundation of our award-winning X4 Series, the 170 X4S is purpose-built with modern technologies for various operating applications. The 170 X4S fits the expanding demands of dynamic contractors thanks to its stability, control, and strength in digging power. It is perfect for road building and maintenance, excavation, site preparation, construction, sewage work, or demolition operations.





NEXT LEVEL STRENGTH



PERFORMANCE BOOST

We understand your work is essential, and we want to help you get it done right, the first time. We engineer reliability and quality into every piece of equipment, offering advanced lifting capabilities (up to 8% with heavy counterweight option), pressure relief with constant boost function, preset flow rate and pressure for up to 10 attachments. With optimized pump control and engine speed, you've got unparalleled digging force and working range.

TOUGH ON DIRT, EASY ON FUEL

The 170 X4S delivers exceptional performance without sacrificing fuel savings. Its YANMAR 4TN107FHT-4SSH1 Final Tier 4 Certified engine delivers 120 horsepower and achieves up to 5% better fuel economy in ECO mode with superior cycle times. Convenient fuel monitoring is at your fingertips.



ROBUST POWER

Our exclusive flow control system starts with more digging power, increased lift capacities and rapid cycle times. Kawasaki electronically controlled pumps guarantee hydraulic flow is delivered precisely when and where it's needed. The result is more maneuverability and precision, smoother machine operation and improved fuel efficiency across all operating modes.

OPERATOR WORK MODES

Stay in control of fuel economy, productivity, and power depending on the task at hand.

Lifting - Lower engine speed for fine control

Eco - Lower fuel consumption

Power - Normal power mode

Speed Priority - For increased productivity





OPTIMIZED FUEL DELIVERY

Under the hood, the 170 X4S Yanmar 4TN107FHT-4SSH1 engine pushes the boundaries of performance and efficiency, delivering significant improvements in several key areas. Operators can expect a boost in horsepower, fuel economy, torque, and faster cycle times.

REDUCED EMISSIONS TECHNOLOGY

This 4-cylinder, 4.6-liter, Tier 4 Certified engine offers both muscle and money savings. It utilizes advanced technology like Common Rail Direct Injection for precise fuel control and reduced emissions. It also features Cooled Exhaust Gas Recirculation (EGR) and a Diesel Particulate Filter for a cleaner-running engine.

AUTOMATED REGENERATION

The DPF automatically regenerates every 100 hours to maintain optimal performance and filter life without interfering with machine operation.





**CLEVER
CUSTOMIZATION**



CUSTOM FLOW

The 170 X4S offers exceptional convenience and operability, integrating throttle volume and frequently used modes into a single panel. Our tailored machine function switches ensure seamless operation for digging and loading tasks. This machine provides customizable operability with four distinct work modes—lifting, eco, power, and speed priority—allowing you to prioritize flow and machine functionality from the comfort of your seat, no matter the job.

CUSTOM ATTACHMENT SETTINGS

Store and name up to 10 distinct attachment settings, customizing the flow rate and pressure you need to get the job done. With tailored attachment operations, lost time and overworking are a thing of the past.



OFFICE WITH A VIEW

The 170 X4S features one of the most spacious, technologically equipped cabs in its class. Joystick functionality and 4 power modes provide quick customization for the work at hand. Controls are always close with the armrests and joystick conveniently built into the seat height adjustment.



COMFORTS OF HOME

To reduce fatigue during long jobs, the 170 X4S features an ergonomic footrest, air suspension, heat, tilt functions, a two-step incline, and optimized foot pedal height. Four styles of superior lumbar back support ensure maximum comfort, while adjustable armrests and a recline feature up to 155 degrees provide added relaxation during breaks.

RELY ON RED

Advances in design deliver the best in comfort and safety during operation. The 170 X4S is manufactured with built-in safety features, the WAVES system, vertical wide monitor for better visibility, auto operation lever lock function.

• MONITOR AND MOVE

The 170 X4S comes equipped with a 10" HD LCD color monitor, allowing for customizable functions and increased visibility as the WAVES system provides a seamless 270° view around your machine. Check detailed fuel information and enable shortcuts for frequently used items, such as machine information, idle mode, auxiliary hydraulics, flow balance and more.

• WAVES+

Upgrade jobsite safety with WAVES+. Alerts notify the operator on screen and with an audible sound when movement is detected within the 270° field of view.

• SAFETY

The auto lever lock safety function prevents accidents due to unexpected operation of joystick, proportional switch, travel lever and pedal. Additional safety features include firewall, ISO-compliant guardrails, seat belt alarm, LED work lights, neutral safety start, and gate lock safety shutoff.



SUPPORT YOU CAN TRUST

With the purchase of a 170 X4S, you'll get expert service and support with real people. Our Customer Support staff are knowledgeable and happy to assist you with parts, service, and warranty questions.



LINK-BELT PARTS

Your Link-Belt Excavators dealer has a wide range of genuine Link-Belt parts in stock. For anything not on the shelf, our dealers have access to the Link-Belt parts depot - available for lookup online.



GROUND-LEVEL MAINTENANCE

All fuel, pilot and oil filters are in one convenient location, including a maintenance-free fuel final filter and ground level hydraulic oil sampling valve, making up keep a cinch.





HASSLE-FREE CARE

Access the radiator compartment and sample or refill hydraulic oil without the need for any tools and relieve pressure from the hydraulic tank via a handy breather cap. Whenever the cab door is opened, machine hours are displayed for 30 seconds, providing useful information when and where you need it most.



WARRANTY

Our products are distinguished by a comprehensive warranty program and strict quality control. The quality and durability of the X4S are backed by a 5-year/5,000-hour full machine warranty. Additionally, our warranties are transferable, adding resale value to your equipment. Ask your local dealer about coverage options today.





PRECISION GRADE

Precision Grade puts operators in the driver's seat for faster, more accurate work. IMU sensors on the machine's arm, bucket, and frame give them a real-time view of the bucket's position compared to the target grade on their in-cab display.



GETS JOBS DONE FASTER

Improve digging and grading accuracy with fewer passes. Save time and money by moving materials right the first time. Reduce time and costs associated with grade staking and checking.



GRADE CONTROL BENEFITS

Improve job site safety by keeping people off the ground and out of trenches.





REMOTE CARE



The 170 X4S comes standard with a new dual-band modem to improve communication and functionality with greater range and real-time data capabilities.

With 24-hour RemoteCARE®, you will always know your equipment's hours, location, performance, diagnostics, and security status. Proactively monitor, plan, and address preventative maintenance items, receive machine health notifications via email, and review average fuel consumption rates for your machine right from your smartphone. Advanced security features like Geofencing, curfew settings, and theft tracking are standard with RemoteCARE®.



MINIMIZE DOWNTIME

From minor troubles caused by incorrect machine settings to advanced problem solving, we expand the range of remote support, shorten the lead time for troubleshooting, and reduce costs by moving people to and reduce costs by minimizing the need for on-site personnel.

NO SUBSCRIPTION FEES

RemoteCARE® is available with no subscription fees to the original owner and is transferable.



Scan QR code to
download RemoteCARE
app for mobile.

Link-Belt
EXCAVATORS



CUSTOMER SUPPORT JUST A CALL AWAY

Owning a Link-Belt excavator is just the beginning. A network of dedicated Link-Belt Excavator dealers stretches across the U.S. and Canada, all ready to provide you with the exceptional service you deserve. You can expect fast, dependable service whenever needed, backed by 24/7 access to parts.

No matter your location or project requirements, there's a Link-Belt dealer nearby to keep your machine running smoothly. Their expertise extends beyond just sales; they can also provide comprehensive maintenance plans, operator training, and financing options to fit your needs.





HEAVY-DUTY COUNTERWEIGHT

Unlock a new level of lifting power while your machine is firmly planted on solid ground. Boost your lifting capacity by up to 8% and experience unmatched stability when maneuvering hefty materials. The increased counterweight provides a firm foundation minimizing the risk of tipping and keeping you in complete control.





170 X4S SPECIFICATIONS

SAE Net Horsepower
120 hp (89.7 kW)

Operating Weight
39,500 lbs (17,900 kg)

Swing Torque
33,300 lbf-ft (45.1 kNm)



ENGINE

YANMAR 4TN107FHT-4SSH1 Final Tier 4 turbocharged diesel engine with electronic control (ECM) and high pressure common-rail fuel injection, 4-cylinder, water-cooled, Cooled Exhaust Gas Recirculation (EGR), Intercooler, Turbocharger, Diesel Oxidation Catalyst (DOC), Diesel Particulate Filter (DPF), and Selective Catalytic Reduction (SCR) system with Dosing Control Module and heated DEF lines and tank. Electronic fuel pump and priming, fuel cooler, auto-idle start, auto warm-up, EPF engine protection, dual-stage fuel filtration, remote oil filter, engine oil sample port, green plug oil drain, double element air filter.

Engine	YANMAR 4TN107FHT-4SSH1 Final Tier 4 turbocharged diesel engine
SAE J 1349 net horsepower	120 HP (89.7 kW) @ 2200 min ⁻¹ (rpm)
Displacement	279 cu in (4.57 L)
Maximum Torque	434 lbf-ft (589 N-m) @ 1500 min ⁻¹ (rpm)
Starter	24 V - 5.0 kW
Alternator	80 amp
Voltage	24 V

CAB AND CONTROLS

ROPS and FOPS Level 1 certified with automatic climate control A/C and heat with defroster, 10" LCD Hi-Definition color monitor with customizable shortcut switches featuring a full time rear view camera display and left and right view camera, fuel efficiency gauge, custom flow control, joysticks are pre-wired for auxiliary hydraulics, knob switch customization, dual LED cab lights with programmable delay turn off, safety glass windows, sunroof with sunshade, shockless cab suspension with four fluid cab mounts, SCM High-Back reclining air-suspension seat with heat & tilt, sliding 4-position tilting control consoles, Bluetooth technology, AM/FM sound system with USB and MP3 auxiliary input jack, digital clock, dome light, seat belt, coat hook, 2 cup holders, storage compartments, floor mat, footrests, smart phone tray, 24V socket, 12V outlet, travel alarm, handrails, mirrors, side-entry cab filter, spare parts kit.

Four selectable work modes (SP, Power, Eco, & Lift), RemoteCARE telematics GPS system, anti-theft password protection system, onboard self-diagnostic system with memory and service interval reminders, auto idling system, one-touch decelerator, auto-idle engine shutdown, neutral safety start, gate-lock safety shutoff, top guard OPG level 1 in cab structure.

170 X4S SPECIFICATIONS

HYDRAULIC SYSTEM

Open-center system, (2) electronically controlled variable displacement axial piston pumps, (1) gear pump for pilot controls. Main control valve with one 4-spool valve and one 5-spool valve with auxiliary spool. Internal anti-drift valves for boom and arm, oil cooler, high performance 6-micron full flow return filter, 8-micron pilot filter, firewall and hydraulic free swing.

Hydraulic Pumps

Pump Output	2 x 42 gpm (159 L/min)
Pilot Pump Maximum Flow	5.8 gpm (22 L/min)

Relief Valve Settings

Boom Up / Arm / Bucket	4,970 psi (34.3 MPa)
in Power Boost	5,260 psi (36.3 MPa)
Swing Circuit	4,050 psi (27.9 MPa)
Travel Circuit	4,970 psi (34.3 MPa)

Hydraulic Cylinders

Number of Cylinders - Bore x Stroke

Boom	2 - 4.5" x 46.4" (115 mm x 1179 mm)
Arm	4.9" x 50.4" (125 mm x 1280 mm)
Bucket	4.1" x 38.8" (105 mm x 985 mm)

SWING

Planetary reduction powered by axial-piston motor, internal ring gear with grease cavity for swing pinion, swing bearing is single-row, shear type ball bearing, mechanical disc swing brake, auto-power swing.

Swing Speed	11.8 rpm
Tail Swing	8' 3" (2.52 m)
Swing Torque	33,300 lbf-ft (45.1 kNm)

UNDERCARRIAGE

13'1" (3.99 m) undercarriage by 6'6" (1.99 m) track gauge, sealed and strutted track chain with double track guide, sealed rollers and idlers, disc type brakes, adjustable track tension, swivel guard.

Carrier Rollers	2 per Side
Track Rollers	7 per Side
Track Link Pitch	7.5" (190 mm)
Shoes	44 per Side
Shoe Width	23.6" (600 mm)
Ground Pressure	
Standard Counterweight	6.1 psi (0.042 MPa)
Heavy Counterweight	6.2 psi (0.043 MPa)

170 X4S SPECIFICATIONS

TRAVEL SYSTEM

Two-speed independent hydraulic travel with compact axial-piston motors, hydraulic motor powered output shaft coupled to a planetary reduction drive and track sprocket, all hydraulic components mounted within the width of side frame, automatic downshift for high torque to overcome obstacles, spring-applied hydraulic release parking brake built into each motor, travel motors equipped with counterbalance valve to prevent over-speeding down an incline, single-pedal straight line travel.

Travel Speeds	1.9 - 3.2 mph (3.0 - 5.2 km/h)
Drawbar Pull	36,200 lbf (161 kN)
Gradeability	70% (35°)

ATTACHMENT

HD Boom	16' 11" (5.15 m)
Available Arms	Digging Force
8' 7" (2.62 m)	17,800 lbf (79.0 kN)
with Auto Power Boost	18,800 lbf (84.0 kN)
10' 0" (3.05 m)	16,200 lbf (72.0 kN)
with Auto Power Boost	17,300 lbf (77.0 kN)
8' 7" (2.62 m) HD	17,800 lbf (79.0 kN)
with Auto Power Boost	18,800 lbf (84.0 kN)
Bucket Digging Force	25,200 lbf (112.0 kN)
with Auto Power Boost	26,500 lbf (118.0 kN)

LUBRICANT AND COOLANT CAPACITY


Fuel Tank	79 Gallons (300 Liters)
Hydraulic System	45 Gallons (170 Liters)
Hydraulic Tank	22 Gallons (82 Liters)
Final Drive (per side)	1.4 Gallons (5.3 Liters)
Swing Drive	1.3 Gallons (4.8 Liters)
Engine Oil	5.7 Gallons (21.5 Liters)
DEF Tank	16 Gallons (60 Liters)
Coolant System	6.2 Gallons (23.3 Liters)

OPERATING WEIGHT

Working weight with 23.6" (600 mm) shoes, 16' 11" (5.15 m) boom, 8' 7" (2.62 m) arm, 1,067 lbs (484 kg) bucket, 6,764 lbs (3,068 kg) standard counterweight	39,500 lbs (17,900 kg)
Working weight with 23.6" (600 mm) shoes, 16' 11" (5.15 m) boom, 8' 7" (2.62 m) arm, 1,067 lbs (484 kg) bucket, 7,646 lbs (3,468 kg) heavy counterweight	40,300 lbs (18,300 kg)

170 X4S SPECIFICATIONS

WORKING RANGE

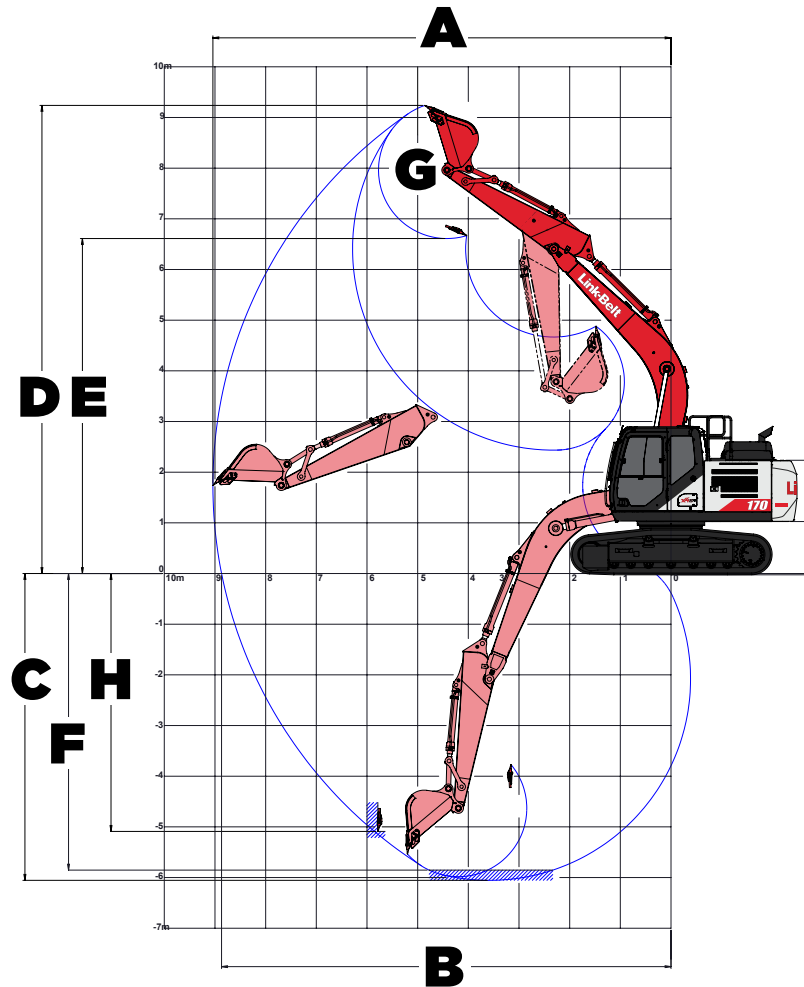

Machine Equipped with 16' 11" (5.15 m) Boom

Arm 8' 7" (2.63 m)*

Arm 10' 0" (3.06 m)

A. Maximum reach

29' 8"
(9.04 m)

30' 9"
(9.38 m)

B. Maximum reach @ ground level

29' 1"
(8.87 m)

30' 3"
(9.22 m)

C. Maximum dig depth

19' 11"
(6.06 m)

21' 4"
(6.49 m)

D. Maximum dig height

30' 4"
(9.24 m)

30' 6"
(9.29 m)

E. Maximum dump height

21' 8"
(6.61 m)

21' 11"
(6.69 m)

F. Digging depth 8' (2.44 m) level
bottom

19' 2"
(5.85 m)

20' 8"
(6.29 m)

G. Bucket rotation


178°

178°

H. Maximum vertical wall depth

16' 8"
(5.08 m)

17' 2"
(5.22 m)

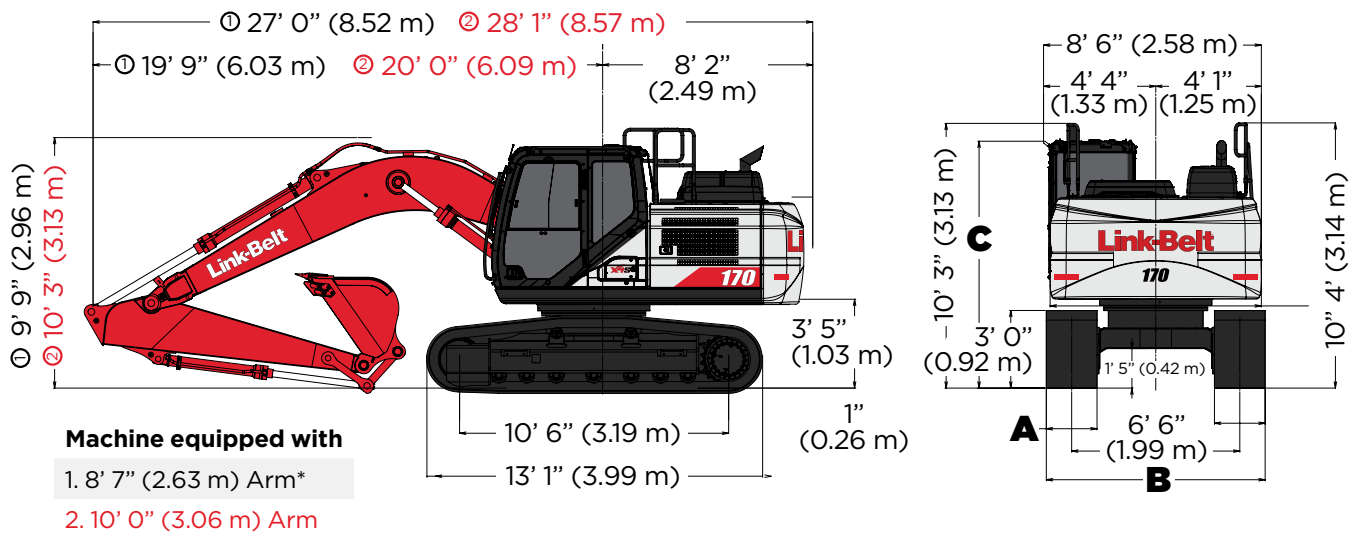

170 X4S SPECIFICATIONS

LIFT CAPACITIES

RADIUS OF LOAD:

8' 7" (2.63 M) ARM WITH 16' 11" (5.15 M) HD BOOM AND STANDARD COUNTERWEIGHT WITH POWER-BOOST APPLIED

		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		Cap at Max. Reach	
		End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0"	lbs														
(9.14 m)	kg														
+25' 0"	lbs													6,800*	6,800*
(7.5 m)	kgs													3080*	3080*
+20' 0"	lbs							7,750*	7,650					5,900*	5,900*
(6.0 m)	kg							3,515*	3,465					2,675*	2,675*
+15' 0"	lbs					11,450*	11,450*	10,700*	7,550					5,650*	5,650*
(4.5 m)	kg					5,190*	5,190*	4,850*	3,420					2,560*	2,560*
+10' 0"	lbs			21,800*	20,100	14,500*	11,000	11,150	7,250					5,700*	5,150
(3.0 m)	kg			9,885*	9,115	6,575*	4,985	5,055	3,285					2,585*	2,335
+5' 0"	lbs					16,600	10,200	10,700	6,850	7,100*	4,950			6,000*	4,900
(1.5 m)	kg					7,525	4,625	4,850	3,105	3,220*	2,245			2,720*	2,220
Ground	lbs			14,200*	14,200*	16,000	9,700	10,400	6,600					6,650*	5,000
Line	kg			6,440*	6,440*	7,255	4,395	4,715	2,990					3,015*	2,265
-5' 0"	lbs	12,950*	12,950*	23,450*	17,400	15,800	9,500	10,300	6,450					8,000*	5,500
(1.5 m)	kg	5,870*	5,870*	10,635*	7,890	7,165	4,305	4,670	2,925					3,625*	2,490
-10' 0"	lbs	23,050*	23,050*	26,100*	17,700	15,950	9,600							10,750	6,800
(3.0 m)	kg	10,455*	10,455*	11,835*	8,025	7,230	4,350							4,875	3,080
-15' 0"	lbs			18,450*	18,450*									12,700*	11,150
(4.5 m)	kg			8,365*	8,365*									5,760*	5,055

RADIUS OF LOAD:

10' 0" (3.06 M) ARM WITH 16' 11" (5.15 M) HD BOOM AND STANDARD COUNTERWEIGHT WITH POWER-BOOST APPLIED

		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		Cap at Max. Reach	
		End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0"	lbs														
(9.14 m)	kg														
+25' 0"	lbs													5,950*	5,950*
(7.5 m)	kgs													2695*	2695*
+20' 0"	lbs							8,150*	7,800					5,300*	5,300*
(6.0 m)	kg							3,695*	3,535					2,400*	2,400*
+15' 0"	lbs							9,800*	7,600					5,100*	5,100*
(4.5 m)	kg							4,445*	3,445					2,310*	2,310*
+10' 0"	lbs			18,850*	18,850*	13,300*	11,150	11,200*	7,250	7,650*	5,100			5,200*	4,800
(3.0 m)	kg			8,550*	8,550*	6,030*	5,055	5,080*	3,285	3,465*	2,310			2,355*	2,175
+5' 0"	lbs			17,650*	17,650*	16,700	10,250	10,750	6,850	7,650	4,950			5,550*	4,550
(1.5 m)	kg			8,005*	8,005*	7,570	4,645	4,875	3,105	3,465	2,245			2,515*	2,060
Ground	lbs			16,300*	16,300*	16,000	9,650	10,350	6,500	7,500*	4,800			6,150*	4,600
Line	kg			7,390*	7,390*	7,255	4,375	4,690	2,945	3,400	2,175			2,785*	2,085
-5' 0"	lbs	12,550*	12,550*	22,900*	17,100	15,700	9,400	10,150	6,350					7,400*	5,000
(1.5 m)	kg	5,690*	5,690*	10,385*	7,755	7,120	4,260	4,600	2,880					3,355*	2,265
-10' 0"	lbs	20,700*	20,700*	27,450*	17,350	15,700	9,400	10,250	6,400					9,550	6,000
(3.0 m)	kg	9,385*	9,385*	12,450*	7,865	7,120	4,260	4,645	2,900					4,330	2,720
-15' 0"	lbs			21,300*	17,950	14,300*	9,800							12,950*	9,000
(4.5 m)	kg			9,660	8,140	6,485*	4,445							5,870*	4,080

170 X4S SPECIFICATIONS

LIFT CAPACITIES

RADIUS OF LOAD:

8' 7" (2.63 M) ARM WITH 16' 11" (5.15 M) HD BOOM AND HEAVY COUNTERWEIGHT WITH POWER-BOOST APPLIED

		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		Cap at Max. Reach	
		End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0"	lbs														
(9.14 m)	kg														
+25' 0"	lbs													6,800*	6,800*
(7.5 m)	kgs													3,080*	3,080*
+20' 0"	lbs							7,750*	7,750*					5,900*	5,900*
(6.0 m)	kg							3,520*	3,520					2,680*	2,680*
+15' 0"	lbs					11,450*	11,450*	10,700*	8,000					5,650*	5,650*
(4.5 m)	kg					5,190*	5,190*	4,850*	3,630					2,560*	2,560*
+10' 0"	lbs			21,800*	21,200	14,500*	11,600	11,700	7,650					5,700*	5,500
(3.0 m)	kg			9,890*	9,620	6,580*	5,260	5,310	3,470					2,590*	2,490
+5' 0"	lbs					17,450	10,800	11,300	7,300	7,100*	5,300			6,000*	5,250
(1.5 m)	kg					7,920	4,900	5,130	3,310	3,220*	2,400			2,720*	2,380
Ground	lbs			14,200*	14,200*	16,850	10,300	10,950	7,000					6,650*	5,300
Line	kg			6,440*	6,440*	7,640	4,670	4,970	3,180					3,020*	2,400
-5' 0"	lbs	12,950*	12,950*	23,450*	18,500	16,650	10,150	10,850	6,900					8,000*	5,850
(1.5 m)	kg	5,870*	5,870*	10,640*	8,390	7,550	4,600	4,920	3,130					3,630*	2,650
-10' 0"	lbs	23,050*	23,050*	26,100*	18,800	16,800	10,250							11,000*	7,200
(3.0 m)	kg	10,460*	10,460*	11,840*	8,530	7,620	4,650							4,940*	3,270
-15' 0"	lbs			18,450*	18,450*									12,700*	11,800
(4.5 m)	kg			8,370*	8,370*									5,760*	5,350

RADIUS OF LOAD:

10' 0" (3.06 M) ARM WITH 16' 11" (5.15 M) HD BOOM AND HEAVY COUNTERWEIGHT WITH POWER-BOOST APPLIED

		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		Cap at Max. Reach	
		End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0"	lbs														
(9.14 m)	kg														
+25' 0"	lbs													5,950*	5,950*
(7.5 m)	kgs													2,700*	2,700*
+20' 0"	lbs							8,150*	8,150*					5,300*	5,300*
(6.0 m)	kg							3,700*	3,700*					2,400*	2,400*
+15' 0"	lbs							9,800*	8,050					5,100*	5,100*
(4.5 m)	kg							4,450*	3,650					2,310*	2,310*
+10' 0"	lbs			18,850*	18,850*	13,300*	11,750	11,200*	7,700	7,650*	5,450			5,200*	5,100
(3.0 m)	kg			8,550*	8,550*	6,030*	5,330	5,080*	3,490	3,470*	2,470			2,360*	2,310
+5' 0"	lbs			17,650*	17,650*	16,750*	10,900	11,300	7,300	8,100	5,250			5,550*	4,850
(1.5 m)	kg			8,010*	8,010*	7,600*	4,940	5,130	3,310	3,670	2,380			2,520*	2,200
Ground	lbs			16,300*	16,300*	16,850	10,250	10,900	6,950	7,900	5,100			6,150*	4,900
Line	kg			7,390*	7,390*	7,640	4,650	4,940	3,150	3,580	2,310			2,790*	2,220
-5' 0"	lbs	12,550*	12,550*	22,900*	18,200	16,500	10,000	10,750	6,800					7,400*	5,350
(1.5 m)	kg	5,690*	5,690*	10,390*	8,260	7,480	4,540	4,880	3,080					3,360*	2,430
-10' 0"	lbs	20,700*	20,700*	27,450*	18,450	16,550	10,050	10,800	6,850					10,050*	6,400
(3.0 m)	kg	9,390*	9,390*	12,450*	8,370	7,510	4,560	4,900	3,110					4,560*	2,900
-15' 0"	lbs			21,300*	19,050	14,300*	10,450							12,950*	9,600
(4.5 m)	kg			9,660*	8,640	6,490*	4,740							5,870*	4,350

170 X4S SPECIFICATIONS

LIFT CAPACITIES

RADIUS OF LOAD:

8' 7" (2.63 M) HD ARM WITH 16' 11" (5.15 M) HD BOOM AND STANDARD COUNTERWEIGHT WITH POWER-BOOST APPLIED

		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		Cap at Max. Reach	
End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0"	lbs														
(9.14 m)	kg														
+25' 0"	lbs														
(7.5 m)	kgs														
+20' 0"	lbs							7,700*	7,550					5,850*	5,850*
(6.0 m)	kg							3,490*	3,420					2,650*	2,650*
+15' 0"	lbs					11,300*	11,300*	10,550*	7,450					5,550*	5,550*
(4.5 m)	kg					5,125*	5,125*	4,785*	3,375					2,515*	2,515*
+10' 0"	lbs			21,600*	19,900	14,350*	10,850	11,000	7,100					5,600*	5,050
(3.0 m)	kg			9,795*	9,025	6,505*	4,920	4,985	3,220					2,540*	2,290
+5' 0"	lbs					16,450	10,050	10,600	6,750	7,050*	4,850			5,950*	4,800
(1.5 m)	kg					7,460	4,555	4,805	3,060	3,195*	2,195			2,695*	2,175
Ground	lbs			14,150*	14,150*	15,850	9,500	10,250	6,450					6,600*	4,850
Line	kg			6,415*	6,415*	7,185	4,305	4,645	2,925					2,990*	2,195
-5' 0"	lbs	12,900*	12,900*	23,400*	17,100	15,600	9,350	10,150	6,350					7,900*	5,350
(1.5 m)	kg	5,850*	5,850*	10,610*	7,755	7,075	4,240	4,600	2,880					3,580*	2,425
-10' 0"	lbs	23,000*	23,000*	25,850*	17,450	15,750	9,450							10,600	6,650
(3.0 m)	kg	10,430*	10,430*	11,725*	7,915	7,140	4,285							4,805	3,015
-15' 0"	lbs			18,250*	18,250									12,550*	11,000
(4.5 m)	kg			8,275*	8,275									5,690*	4,985

170 X4S SPECIFICATIONS

LIFT CAPACITIES

RADIUS OF LOAD:

8' 7" (2.63 M) HD ARM WITH 16' 11" (5.15 M) HD BOOM AND HEAVY COUNTERWEIGHT WITH POWER-BOOST APPLIED

		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		Cap at Max. Reach	
End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0" (9.14 m)	lbs														
	kg														
+25' 0" (7.5 m)	lbs													6,750*	6,750*
	kgs													3,060*	3,060*
+20' 0" (6.0 m)	lbs							7,700*	7,700*					5,850*	5,850*
	kg							3,490*	3,490*					2,650*	2,650*
+15' 0" (4.5 m)	lbs					11,300*	11,300*	10,550*	7,850					5,550*	5,550*
	kg					5,125*	5,125*	4,785*	3,560					2,515*	2,515*
+10' 0" (3.0 m)	lbs			21,600*	21,000	14,350*	11,500	11,550	7,550					5,600*	5,350
	kg			9,795*	9,525	6,505*	5,215	5,235	3,420					2,540*	2,425
+5' 0" (1.5 m)	lbs					17,300	10,650	11,150	7,150	7,050*	5,200			5,950*	5,100
	kg					7,845	4,830	5,055	3,240	3,195*	2,355			2,695*	2,310
Ground	lbs			14,150*	14,150*	16,650	10,150	10,850	6,850					6,600*	5,200
Line	kg			6,415*	6,415*	7,550	4,600	4,920	3,105					2,990*	2,355
-5' 0" (1.5 m)	lbs	12,900*	12,900*	23,400*	18,200	16,450	9,950	10,700	6,750					7,900*	5,700
	kg	5,850*	5,850*	10,610*	8,255	7,460	4,510	4,850	3,060					3,580*	2,585
-10' 0" (3.0 m)	lbs	23,000*	23,000*	25,850*	18,550	16,600	10,050							10,950*	7,100
	kg	10,430*	10,430*	11,725*	8,410	7,525	4,555							4,965*	3,220
-15' 0" (4.5 m)	lbs			18,250*	18,250*									12,550*	11,650
	kg			8,275*	8,275*									5,690*	5,280

NOTES: EXCAVATOR LIFTING CAPACITIES

- 1) The lift capacities above are based on the ISO standard, ISO 10567:2007 -"Earthmoving Machinery - Hydraulic Excavators - Lift Capacity"
- 2) Lifting capacities shown should not be exceeded. The weight of all lifting accessories must be deducted from the above lifting capacities. The use of a work tool attachment point as the lift point could affect the machine lift performance.
- 3) Lifting capacities are based on the machine standing on a firm, uniform supporting surface. Users must make allowances for job conditions such as soft or uneven ground.
- 4) Lifting capacities shown do not exceed 75% of the minimum tipping loads or 87% of the hydraulic capacities. Lifting capacities marked with an asterisk (*) are limited by hydraulic capacities.
- 5) The least stable position is lifting over the side.
- 6) Operators should be fully acquainted with the Operator's Manual & Operating Safety Booklet, furnished by LBX Company LLC before operating the machine.
- 7) Lift capacities apply only to the machine as originally manufactured and normally equipped by LBX Company LLC.
- 8) This lift chart is without bucket.

170 X4S SPECIFICATIONS

STANDARD EQUIPMENT

CAB

- 270° WAVES 3-Camera System
- 12V Power Outlet
- AM/FM Sound System
- Anti-Theft Device
- Auxiliary Switches on Control Lever
- Bluetooth
- Cab Air Filter - External
- Cab Handrails
- Cab Interior Light
- Cab ISO-Mounts
- LED Cab Lights
- Clear Roof Window
- Climate Control A/C and Heater
- Cup Holder (2)
- Defroster
- Digital Clock
- Emergency Exit and Hammer
- Face Vent
- Floor Mat (Split)
- Front Window One-Touch Lock
- Gate Lock Hydraulic Activation
- Horn
- Hour Meter (Digital)
- LCD 10" Color Monitor
- Maintenance Interval Reminders
- MP3 Auxiliary Input
- On-Board Diagnostic
- Radio Mute Switch
- Rear View Camera
- Rear View Mirrors (2)
- RemoteCARE Support System (GPS)
- Roof Sun Shade
- ROPS/FOPS Level 1 Certified Structure
- Safety Glass Windows
- SCM Air-Suspension Seat with Tilt & Heater
- Seat Recline
- Selectable Monitor Languages

- Side View Cameras (2)
- Small Storage
- Smart Phone Tray
- Travel Alarm with Cancel Switch
- Trip Meter (Digital)
- Wiper & Washer
- Wiper Switch on RH Joystick

ENGINE

- 80A Alternator
- Air Filter (Double Element)
- Air Filter Restriction Indicator
- Auto Warm-Up System
- Auto-Idle
- Auto-Idle Shutdown
- Battery Disconnect Switch w/ LED Light
- Cooling Fan
- DEF Gauge on Monitor
- Diesel Particulate Filter (DPF)
- Diesel Oxidation Catalyst (DOC)
- Drain for Fuel Tank
- Dual Remote Fuel Filters with Water Separators
- EGR Coolers
- Emergency Engine Stop
- Engine Oil Sample Port
- Engine Protection Feature
- External Fuel Gauge
- External DEF Gauge
- Fan Belt Auto Tensioner
- Fan Housing
- Fuel Cooler
- Fuel Filter Restriction Indicator
- Fuel Management System
- Fuel Usage History
- Fuel Usage Monitor
- Glow Plug Pre-Heat

- Idle-Start
- Intercooler
- Neutral Start
- One-Touch Idle
- Radiator / Oil Cooler / Intercooler Protective Screens
- Remote Engine Oil Drain
- Remote Oil Filter
- Selective Catalytic Reduction (SCR)
- Turbocharger

HYDRAULICS

- Anti-drift valves (Arm & Boom)
- Arm Regeneration
- Arm Speed Assistance (2 Pump Flow)
- Attachment Cushion Valve
- Auto Swing Priority
- Custom Flow Control
- Auxiliary Tool Settings (Custom Naming)
- Auxiliary Valve
- Boom Regeneration
- Boom Speed Assistance (2 Pump Flow)
- Bucket Curl Assist
- Control Levers Pre-Wired for Auxiliary Hyd.
- Pattern Control Valve (2 way)
- Electronically Controlled Hydraulic Pumps
- Fire Wall
- Free Swing
- Hydraulic Filter Restriction Indicator
- Hydraulic Oil Sample Port
- Long Life Hydraulic Oil (5,000 Hour)
- Neutral Pump De-Stroke
- Oil Cooler

- Power Boost
- Power Save
- Pressure Reading on Monitor
- Pump Stand-By Pressure

UNDERCARRIAGE

- 600 mm shoes (23.6 in) 3-Bar Steel
- Extended Steps
- Lashing Points (Tie-Downs)
- Sealed Link Chain
- Single Track Guide
- Strutted Track Chain
- Swivel Guard

UPPERSTRUCTURE

- Counterweight (6,764 lbs)
- Center Cover (Over Main CV)
- Fuel Tank Belly Pan
- ISO Guard Rails
- LED Tool Box Light
- Lockable Fuel Cap and Service Doors
- Lockable Hydraulic Oil Tank Cap
- Lockable Engine Hood
- Lockable Tool Box

ATTACHMENT

- 8' 7" (2.63 m) Arm
- 16' 11" (5.15 m) HD Boom
- Auxiliary Pipe Brackets
- Chrome Pins
- HD Bucket Linkage
- LED Boom Light
- Quick Coupler Lines
- Precision Grade Brackets
- Teardrop Pin Retention Keepers

170 X4S SPECIFICATIONS

OPTIONAL EQUIPMENT

CAB

- 270° WAVES+ 3-Camera System
- Cab Sun Visor (Front)
- CAB Head Guard (FOPS Level 2)
- Front Guard (Mesh)
- Front Guard (BAR - OPG Level 1)
- Front Guard (BAR - OPG Level 2)
- LED Lights for WAVES Cameras (4)
- Rain Deflector
- Vandal Cover (Front Window)

PRECISION GRADE

- 2D Machine Control
- 2D Machine Guidance

ENGINE

- Air Pre-Cleaner
- Reversible Cooling Fan

HYDRAULICS

- Hose Burst Check Valve

AUXILIARY HYDRAULIC OPTIONS

- Multi-Function Aux. w/ in-cab Pressure Settings and RH Proportional Joystick

- Combination Aux. w/ in-cab Pressure Settings and LH/RH Proportional Joysticks

UNDERCARRIAGE

- 600 mm shoes (23.6 in) 3-Bar Steel
- 700 mm shoes (27.5 in) 3-Bar Steel
- Triple Track Guards

ATTACHMENT

- 10' 0" (3.05 m) Arm
- 8' 7" (2.63 m) HD Arm

UPPERSTRUCTURE

- Heavy Duty Counterweight (7,646 lbs)

BUCKET SIZES



Scan the QR code to find the right size bucket, thumb, and coupler combination for the 170 X4S.

Or visit qrco.de/bdwHWn





Link-Belt[®]

EXCAVATORS

LBX Company
lbxco.com

For more information
- including a digital
version of this brochure
- scan the QR code.



#LBX2514 • 8/24

LBX[®] and Link-Belt[®] are registered trademarks. Copyright 2024. All rights reserved. We are constantly improving our products and therefore reserve the right to change designs and specifications.